


# • NOHA MODEL 1

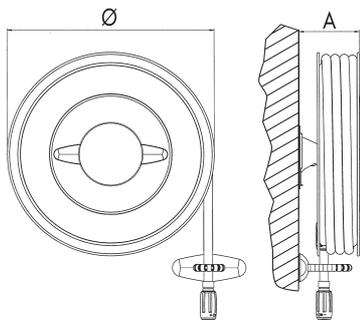

## NOHA FIXED FIRE HOSE REEL FOR WALL-MOUNTING

For use in factories, warehouses and showrooms.

### NOHA MODEL 1 IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- 1" manual stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- Wall-mounting bracket
- Roller hose guide allowing the hose to be run out in any direction
- Centre parts made of brass
- Adjustable brake
- Clockwise rotation
- NOHA installation instructions


Model	Hose length in metres		Dimensions in mm Ø x A	Order number
	19 mm	25 mm		
1	20		600 x 175	555001
1	25		600 x 175	555002
1	30		600 x 175	555003
1		20	600 x 230	555004
1		25	600 x 230	555005
1		30	600 x 230	555006

### OPTIONS

- Red hose
- Light hose



# • NOHA MODEL 1A

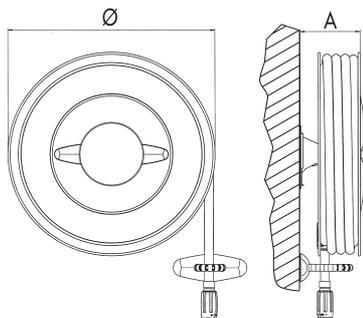

## NOHA FIXED FIRE HOSE REEL WITH AUTOMATIC STOP VALVE FOR WALL-MOUNTING

The automatic stop valve opens to provide full capacity within just two revolutions of the reel.

For use in factories, warehouses and showrooms.

### NOHA MODEL 1A IS CE-MARKED ACCORDING TO EN671-1 AND SUPPLIED WITH:

- Hose reel with side discs powder coated RAL 3001 red gloss 15
- Integrated NOHA automatic stop valve
- NOHA quick-change coupling system on reel outlet
- NOHA jet/spray/shut-off nozzle
- NOHA special black hose, designed to standard EN694 for fire hose reels
- Wall-mounting bracket
- Roller hose guide allowing the hose to be run out in any direction
- Centre parts made of brass
- Adjustable brake
- Clockwise rotation
- NOHA installation instructions

Model	Hose length in metres		Dimensions in mm Ø x A	Order number
	19 mm	25 mm		
1A	20		600 x 175	555007
1A	25		600 x 175	555008
1A	30		600 x 175	555009
1A		20	600 x 230	555010
1A		25	600 x 230	555011
1A		30	600 x 230	555012

### OPTIONS

- Red hose
- Light hose
- Anti-clockwise rotation

