



DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DW-6201CQ0234

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	E. Hawle Armaturenwerke GmbH Wagrainer Straße 13, A-4840 Vöcklabruck
Vertreiber <i>distributor</i>	E. Hawle Armaturenwerke GmbH Wagrainer Straße 13, A-4840 Vöcklabruck
Produktart <i>product category</i>	Armaturen für die Wasserversorgung: Absperrklappe (6201)
Produktbezeichnung <i>product description</i>	Doppelexzentrische Flanschabsperrklappe für die Trinkwasserversorgung
Modell <i>model</i>	ÖZ-KAN
Prüfberichte <i>test reports</i>	Baumusterprüfung: 415.658-1 vom 06.07.2015 (OFM) KTW-Prüfung: KA 003B/13 vom 30.07.2013 (TZW) Mikrobiologische Prüfung: MO 006/13 vom 27.08.2013 (TZW) KTW-Prüfung: 415.660 vom 07.07.2015 (ÖFI) Mikrobiologische Prüfung: W-211795-11-SI vom 22.12.2011 (TZW)
Prüfgrundlagen <i>test basis</i>	DVGW W 363-(P) (01.06.2010) DIN EN 1074-1 (01.07.2000) DIN EN 1074-2 (01.07.2004) BGA KTW (12.12.1985) UBA BESCH-LL (30.11.2010) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	06.07.2020 / 15-0341-WNE

70028-04-A-DE

10.07.2015 Wg A-1/2 
Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998 akkreditierte
Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ <i>type</i>	Technische Daten <i>technical data</i>	Bemerkungen <i>remarks</i>
9881	Druckstufe: PN 10/16 Nennweite: DN 150	
9881	Druckstufe: PN 10/16 Nennweite: DN 200	
9881	Druckstufe: PN 10/16 Nennweite: DN 250	
9881	Druckstufe: PN 10/16 Nennweite: DN 300	
9881	Druckstufe: PN 10/16 Nennweite: DN 350	
9881	Druckstufe: PN 10/16 Nennweite: DN 400	
9881	Druckstufe: PN 10/16 Nennweite: DN 450	
9881	Druckstufe: PN 10/16 Nennweite: DN 500	
9881	Druckstufe: PN 10/16 Nennweite: DN 600	
9881	Druckstufe: PN 10/16 Nennweite: DN 700	
9881	Druckstufe: PN 10/16 Nennweite: DN 800	
9881	Druckstufe: PN 10/16 Nennweite: DN 900	
9881	Druckstufe: PN 10/16 Nennweite: DN 1000	
9881	Druckstufe: PN 10/16 Nennweite: DN 1100	
9881	Druckstufe: PN 10/16 Nennweite: DN 1200	

zertifizierte Bauteile / Werkstoffe**certified components**

Registr.-Nr. <i>registration no.</i>	Bauteil (Produktart) <i>component</i>	Modell/Typ <i>model/type</i>	Hersteller <i>manufacturer</i>
DW-5253BQ0577	Dichtungswerkstoff für die Trinkwasserinstallation	01/U70 EP/01/U70 EP	LAV.EL GOMMA S.r.l.


 DVGW



CERT

DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DW-6201CQ0235

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	E. Hawle Armaturenwerke GmbH Wagrainer Straße 13, A-4840 Vöcklabruck
Vertreiber <i>distributor</i>	E. Hawle Armaturenwerke GmbH Wagrainer Straße 13, A-4840 Vöcklabruck
Produktart <i>product category</i>	Armaturen für die Wasserversorgung: Absperrklappe (6201)
Produktbezeichnung <i>product description</i>	Doppelexzentrische Flanschabsperrklappe für die Trinkwasserversorgung
Modell <i>model</i>	HAWLE
Prüfberichte <i>test reports</i>	Baumusterprüfung: 415.658-2 vom 06.07.2015 (OFM) KTW-Prüfung: KA 003B/13 vom 30.07.2013 (TZW) Mikrobiologische Prüfung: MO 006/13 vom 27.08.2013 (TZW) KTW-Prüfung: 415.660 vom 07.07.2015 (ÖFI) Mikrobiologische Prüfung: W-211795-11-SI vom 22.12.2011 (TZW)
Prüfgrundlagen <i>test basis</i>	DVGW W 363-(P) (01.06.2010) DIN EN 1074-1 (01.07.2000) DIN EN 1074-2 (01.07.2004) BGA KTW (12.12.1985) UBA BESCH-LL (30.11.2010) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	06.07.2020 / 15-0341-WNE

70028 04-A DE

10.07.2015 Wg A-112

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998 akkreditierte
Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ type	Technische Daten technical data	Bemerkungen remarks
9881K	Druckstufe: PN 10/16 Nennweite: DN 150	
9881K	Druckstufe: PN 10/16 Nennweite: DN 200	
9881K	Druckstufe: PN 10/16 Nennweite: DN 250	
9881K	Druckstufe: PN 10/16 Nennweite: DN 300	
9881K	Druckstufe: PN 10/16 Nennweite: DN 350	
9881K	Druckstufe: PN 10/16 Nennweite: DN 400	
9881K	Druckstufe: PN 10/16 Nennweite: DN 450	
9881K	Druckstufe: PN 10/16 Nennweite: DN 500	
9881K	Druckstufe: PN 10/16 Nennweite: DN 600	
9881K	Druckstufe: PN 10/16 Nennweite: DN 700	
9881K	Druckstufe: PN 10/16 Nennweite: DN 800	
9881K	Druckstufe: PN 10/16 Nennweite: DN 900	
9881K	Druckstufe: PN 10/16 Nennweite: DN 1000	
9881K	Druckstufe: PN 10/16 Nennweite: DN 1100	
9881K	Druckstufe: PN 10/16 Nennweite: DN 1200	

zertifizierte Bauteile / Werkstoffe
certified components

Registr.-Nr. registration no.	Bauteil (Produktart) component	Modell/Typ model/type	Hersteller manufacturer
DW-5253BQ0577	Dichtungswerkstoff für die Trinkwasserinstallation	01/U70 EP/01/U70 EP	LAV.EL GOMMA S.r.l.

DVGW



CERT

DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DW-6215BU0143

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Armaturen für die Wasserversorgung: Be- und Entlüftungsventile für die Trinkwasserversorgung (6215)
Produktbezeichnung <i>product description</i>	Be- und Entlüftungsventil für die Trinkwasserversorgung
Modell <i>model</i>	986
Prüfberichte <i>test reports</i>	Kontrollprüfung Labor: vom 12.08.2015 (TZW) Baumusterprüfung: A0 025/15 vom 05.08.2015 (TZW) KTW-Prüfung: KA 0305/16 vom 21.09.2016 (TZW) Mikrobiologische Prüfung: W-260755-15-SI/le vom 25.08.2015 (WHY) KTW-Prüfung: KA 0125/13 vom 29.07.2013 (TZW)
Prüfgrundlagen <i>test basis</i>	DVGW W 363-(P) (01.06.2010) DIN EN 1074-4 (01.10.2000) UBA METALLE (15.03.2017) UBA ELASTOM (16.03.2016) UBA KTW (07.03.2016) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	20.04.2022 / 17-0055-WNV

7028-Q-A-DE

10.05.2017 GI A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to DIN EN
ISO/IEC 17065:2013 for certification of products for energy and water supply
industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-05

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ type	Technische Daten technical data	Bemerkungen remarks
986	Druckstufe: PN 16 Nennweite: IG 2"	
986	Druckstufe: PN 16 Nennweite: DN 50	
986	Druckstufe: PN 16 Nennweite: DN 80	
986	Druckstufe: PN 16 Nennweite: DN 100	
986	Druckstufe: PN 16 Nennweite: DN 150	
986	Druckstufe: PN 16 Nennweite: DN 200	

zertifizierte Bauteile / Werkstoffe
certified components

Registr.-Nr. registration no.	Bauteil (Produktart) component	Modell/Typ model/type	Hersteller manufacturer
NW-6102CL0265	Kugelhahn	93../9380, 9381, 9390, 9391, 9396, 9397	WESA-Armaturen GmbH
DW-5253CR0217	Dichtungswerkstoff für die Trinkwasserinstallation	EPDM 70 M 534/EPDM 70 M 534	DUCI s.r.l.



CERT

DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DW-6215BU0209

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Armaturen für die Wasserversorgung: Be- und Entlüftungsventile für die Trinkwasserversorgung (6215)
Produktbezeichnung <i>product description</i>	Be- und Entlüftungsventil für die Trinkwasserversorgung
Modell <i>model</i>	987-HaVent
Prüfberichte <i>test reports</i>	Kontrollprüfung Labor: vom 12.08.2015 (TZW) Baumusterprüfung: A0 024/15 vom 05.08.2015 (TZW) KTW-Prüfung: KA 0369/13 vom 17.06.2014 (TZW) Mikrobiologische Prüfung: MO 118/14 vom 17.06.2014 (TZW) KTW-Prüfung: K-231271-13-Ko vom 20.06.2013 (WHY)
Prüfgrundlagen <i>test basis</i>	DVGW W 363-(P) (01.06.2010) DIN EN 1074-4 (01.10.2000) UBA METALLE (15.03.2017) UBA ELASTOM (16.03.2016) UBA KTW (07.03.2016) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	15.05.2022 / 17-0055-WNV

10.05.2017 GI A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to DIN EN
ISO/IEC 17065:2013 for certification of products for energy and water supply
industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-05

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ <i>type</i>	Technische Daten <i>technical data</i>	Bemerkungen <i>remarks</i>
987-HaVent	Druckstufe: PN 16 Nennweite: 2"	Innengewinde 2" / Flansch DN 50 und DN 80

zertifizierte Bauteile / Werkstoffe
certified components

Registr.-Nr. <i>registration no.</i>	Bauteil (Produktart) <i>component</i>	Modell/Typ <i>model/type</i>	Hersteller <i>manufacturer</i>
DW-5212CN0371	Dichtungswerkstoff aus Elastomeren für sea ep 70/sea ep 70 Trinkwasserversorgungsleitungen		SEA RUBBER s.r.l.



CERT

DIN-DVGW-Baumusterprüfzertifikat

DIN-DVGW type examination certificate

NW-6215BS5030

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	A.R.I. Flow Control Accessories Ltd. Kibbutz Kfar Charuv, IL-12923 Ramat Hagolan
Vertreiber <i>distributor</i>	A.R.I. Flow Control Accessories Ltd. Kibbutz Kfar Charuv, IL-12923 Ramat Hagolan
Produktart <i>product category</i>	Armaturen für die Wasserversorgung: Be- und Entlüftungsventile für die Trinkwasserversorgung (6215)
Produktbezeichnung <i>product description</i>	Be- und Entlüftungsventile für die Trinkwasserversorgung
Modell <i>model</i>	D-040, D-050, D-060, S-050, D-070
Prüfberichte <i>test reports</i>	Kontrollprüfung Labor: 404.651-2 vom 29.10.2012 (ÖFI) Baumusterprüfung: 404.651-2 vom 19.12.2011 (ÖFI) KTW-Prüfung: 406.081/1 vom 25.02.2013 (ÖFI) Mikrobiologische Prüfung: 406.045/1 vom 19.10.2012 (ÖFI) KTW-Prüfung: 406.081/2 vom 25.02.2013 (ÖFI)
Prüfgrundlagen <i>test basis</i>	DVGW W 363 (01.06.2010) DIN EN 1074-1 (01.07.2000) DIN EN 1074-4 (01.10.2000) UBA KTW (07.10.2008) BGA KTW (12.12.1985) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	22.02.2018 / 13-0133-WNV

70000-04-A-DE

06.08.2013 G1 A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ <i>type</i>	Technische Daten <i>technical data</i>	Bemerkungen <i>remarks</i>
Familie D-040, S-050	Nennweite: DN 15	
Familie D-040, S-050	Nennweite: DN 20	
Familie D-040, S-050, D-050	Nennweite: DN 25	
Familie D-040, S-050, D-050	Nennweite: DN 50	
Familie D-040, S-050, D-050	Nennweite: DN 80	
Familie D-050, D-060	Nennweite: DN 100	
Familie D-050, D-060	Nennweite: DN 150	
Familie D-050, D-060	Nennweite: DN 200	
Familie D-050, D-060	Nennweite: DN 250	
Familie D-070	Nennweite: DN 300	

Ausführungsvariante <i>type variation</i>	Erläuterungen <i>explanations</i>
Familie D-040	selbsttätiges 3-Wege Be- und Entlüftungsventil; PN16; Nennweiten: DN 80 bis DN 200
Familie D-050	selbsttätiges 3-Wege Be- und Entlüftungsventil; PN16; Nennweiten: DN 100 bis DN 300
Familie D-060	selbsttätiges Belüftungsventil; PN10; Nennweiten: DN 50
Familie S-050	selbsttätiges Belüftungsventil; PN16; Nennweiten: DN 80 bis DN200
Familie D-040	Ausführungen: D-040-B, D-040-VA, D-040-C, D-040-Mini, DT-040-Micro, D-090
Familie D-050	Ausführungen: D-050, D-050-C, D-052, K-010, K-012, K-014, K-016
Familie D-060	Ausführungen: D-060, D-060-C, D-060-HF, D-060-NS, K-060, K-062, K-062-HF, K-060 NS, K-062 NS
Familie S-050	Ausführungen: S-050-B, S-050-C, S-050-VA, S-052, S-012, S-014, S-016
Familie D-070	Ausführungen: D-070, D-070-M1, D-070-I, D-070-P, D-070-P M1, D-070-P M2



CERT

DIN-DVGW-Baumusterprüfzertifikat

DIN-DVGW type examination certificate


NG-4313BL0256

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Gasversorgung <i>products of gas supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Gasarmaturen: Absperrarmatur <= PN 16 (4313)
Produktbezeichnung <i>product description</i>	Weichdichtender Keil-Flachschieber mit innenliegendem Spindelgewinde, wahlweise mit auswechselbarer Schaltwellenabdichtung
Modell <i>model</i>	E2, 400/405/409/450/451/470/437
Prüfberichte <i>test reports</i>	Ergänzungsprüfung: 14/011/4313/953 vom 28.10.2014 (EBI) Kontrollprüfung Labor: 13/1175/4313/953 vom 14.08.2013 (EBI)
Prüfgrundlagen <i>test basis</i>	DIN EN 13774 (01.05.2013)

70028-04-A-DE

Ablaufdatum / AZ
date of expiry / file no. 01.02.2019 / 13-0556-GNV

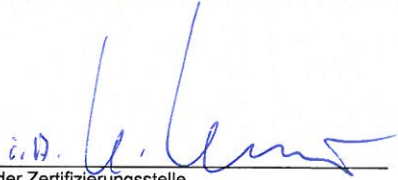11.12.2014 Rie A-1/2 

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Gasart <i>gas category</i>	Bemerkungen <i>remarks</i>
Brenngase nach G260	

Typ <i>type</i>	Technische Daten <i>technical data</i>	Bemerkungen <i>remarks</i>
E2, 400/405/409/470	Nennweite: DN 50	
E2, 400/470	Nennweite: DN 65	
E2, 400/405/409/450/451/470/ 437	Nennweite: DN 80	
E2, 400/405/409/450/451/470/ 437	Nennweite: DN 100	
E2, 400/450/451/470/437	Nennweite: DN 125	
E2, 400/405/409/450/451/470/ 437	Nennweite: DN 150	
E2, 400/405/409/450/451/470/ 437	Nennweite: DN 200	
E2, 400/450/451/470/437	Nennweite: DN 250	
E2, 400/450/451/470/437	Nennweite: DN 300	
E2, 400/470	Nennweite: DN 350	
E2, 400/470	Nennweite: DN 400	

Ausführungsvariante <i>type variation</i>	Erläuterungen <i>explanations</i>
400	Druckstufe: MOP 16; Anschlussart: beiderseitig Flansche nach DIN EN 1092-2; Baulänge: Reihe 14 nach DIN EN 558-1
405	Druckstufe: MOP 4 (PE80)/MOP 10 (PE100); Anschlussart: beidseitig PE-Anschweißstutzen für PE-HD-Rohre, d 63...d 225
409	wie Ausf. 405, einseitig Flansch nach DIN EN 1092-2, Baulänge: Reihe 15 n. DIN EN 558-1
437	Druckstufe: MOP 16; Anschlussart: drei Doppelfunktionssteckmuffensystem BAIO®, davon 1 Anschluss (nur DN 80 bis 150) absperrbar
450	Druckstufe: MOP 16; Anschlussart: beiderseitig Doppelfunktionssteckmuffensystem BAIO®, Baulänge: anl. Reihe 15 nach DIN EN 558-1
451	wie Ausf. 450, jedoch mit Anschlussart einseitig "Baio" mit Spitzende AD nach DIN 28610
470	Druckstufe: MOP 16; Anschlussart: beiderseitig Flansche nach DIN EN 1092-2; Baulänge: Reihe 15 nach DIN EN 558-1

zertifizierte Bauteile / Werkstoffe *certified components*

Registr.-Nr. <i>registration no.</i>	Bauteil (Produktart) <i>component</i>	Modell/Typ <i>model/type</i>	Hersteller <i>manufacturer</i>
DV-7511BL0314	Übergang auf PE-HD für Gas- und Trinkwasserrohre	534/534	Hawle Armaturen GmbH
NG-5113BP0262	Dichtungswerkstoff aus Elastomeren für Gasversorgungs- und Gasfernleitungen	6766/6766	GUMASOL Rubber-Tec GmbH
DV-7705BM0480	Formstücke aus duktilem Gusseisen	BAIO®-System/BAIO®-System	Hawle Armaturen GmbH

Verwendungshinweise / Bemerkungen *hints of utilization / remarks*

Umgebungstemperaturbereich: -20...+60 °C

DVG



CERT

DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DW-7511AR2048

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Werkstoffübergangsverbinder: Übergang auf PE-HD für Trinkwasserrohre (7511)
Produktbezeichnung <i>product description</i>	Klemmverbinder aus Gusseisen (GG 25) in verschiedenen Ausführungen für Rohre aus PE bzw. PE-Xa für erdverlegte Trinkwasserleitungen, Form K4
Modell <i>model</i>	HAWLE-ISO-Steckfitting
Prüfberichte <i>test reports</i>	Baumusterprüfung: 17269 vom 29.05.2015 (GWI) KTW-Prüfung: KA 0364/12 vom 11.02.2013 (TZW) Mikrobiologische Prüfung: 410.136 vom 19.08.2013 (ÖFI) KTW-Prüfung: KA 0030/13 vom 20.02.2013 (TZW) Mikrobiologische Prüfung: W-227380e-13-SI vom 15.03.2013 (WHY) KTW-Prüfung: KA 275-11 vom 19.09.2011 (TZW) Mikrobiologische Prüfung: W-211795-11-SI vom 22.12.2011 (WHY)
Prüfgrundlagen <i>test basis</i>	DVGW GW 335-B4/(P) (01.04.2014) DIN 8076-1 (01.03.1984) BGA KTW (12.12.1985) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	19.03.2020 / 14-0488-WNV

70028-04-A-DE

11.06.2015 GI A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ type	Technische Daten technical data	Bemerkungen remarks
HAWLE-ISO-Steckfitting	Nenndurchmesser: 25 mm	mit Stützhülse aus Messing
HAWLE-ISO-Steckfitting	Nenndurchmesser: 32 mm	mit Stützhülse aus Messing
HAWLE-ISO-Steckfitting	Nenndurchmesser: 40 mm	mit Stützhülse aus Messing
HAWLE-ISO-Steckfitting	Nenndurchmesser: 50 mm	mit Stützhülse aus Messing
HAWLE-ISO-Steckfitting	Nenndurchmesser: 63 mm	mit Stützhülse aus Messing

Verwendungshinweise / Bemerkungen

hints of utilization / remarks

Abmessungsreihe: SDR 11

Druckstufe in Verbindung mit Rohren aus PE 80: PN 12,5

Druckstufe in Verbindung mit Rohren aus PE 100: PN 16

Druckstufe in Verbindung mit Rohren aus PE-Xa: PN 12,5



CERT

DIN-DVGW-Baumusterprüfzertifikat

DIN-DVGW type examination certificate

NW-6411AU2266

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Hydranten und Straßenkappen: Überflurhydrant (6411)
Produktbezeichnung <i>product description</i>	Überflurhydrant
Modell <i>model</i>	H 4
Prüfberichte <i>test reports</i>	Kontrollprüfung Labor: vom 01.10.2013 (TZW) Baumusterprüfung: A00 036/10 - 038/10 vom 16.12.2010 (TZW) KTW-Prüfung: KA 0003/13 vom 30.07.2013 (TZW) Mikrobiologische Prüfung: MO 006/13 vom 27.08.2013 (TZW) KTW-Prüfung: KA 0030/13 vom 20.02.2013 (TZW) Mikrobiologische Prüfung: W-227380e-13-SI vom 15.03.2013 (WHY)
Prüfgrundlagen <i>test basis</i>	DVGW VP 325 (01.01.2008) DIN EN 1074-6 (01.03.2009) BGA KTW (12.12.1985) UBA KTW (07.10.2008) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	09.07.2018 / 15-0063-WNV

05.08.2015 GI A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ <i>type</i>	Technische Daten <i>technical data</i>	Bemerkungen <i>remarks</i>
H 4 Niro starr;	Bauform: AU 80 16 1,5	
H 4 Niro Umfahrrhydrant	Druckstufe: PN 16	
H 4 Niro starr;	Bauform: AU 100 16 1,5	
H 4 Niro Umfahrrhydrant	Druckstufe: PN 16	
H 4 Niro Umfahrrhydrant	Bauform: AFU 100 16 1,5	mit Fallmantel
	Druckstufe: PN 16	

zertifizierte Bauteile / Werkstoffe**certified components**

Registr.-Nr. <i>registration no.</i>	Bauteil (Produktart) <i>component</i>	Modell/Typ <i>model/type</i>	Hersteller <i>manufacturer</i>
DV-7705BM0480	Formstücke aus duktilem Gusseisen	BAIO®-System/BAIO®-System	Hawle Armaturen GmbH



CERT

DIN-DVGW-Baumusterprüfzertifikat

DIN-DVGW type examination certificate

NW-6401AT2392

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Hydranten und Straßenkappen: Unterflurhydrant (6401)
Produktbezeichnung <i>product description</i>	Unterflurhydrant
Modell <i>model</i>	Freistrom-Unterflurhydrant (490)
Prüfberichte <i>test reports</i>	Mechanikprüfung: AO 030/15 vom 12.08.2015 (TZW) Mechanikprüfung: AO 040/13 vom 01.10.2013 (TZW) Baumusterprüfung: AO 039/10 vom 23.12.2010 (TZW) KTW-Prüfung: KA 0097/15 vom 31.12.2011 (TZW) Mikrobiologische Prüfung: MO 091/15 vom 06.07.2015 (TZW)
Prüfgrundlagen <i>test basis</i>	DVGW W 386-P (01.09.2014) DIN EN 1074-6 (01.03.2009) BGA KTW (12.12.1985) UBA KTW (07.10.2008) UBA BESCH-LL (30.11.2010) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	02.05.2021 / 15-0624-WNV

70028-04-A-DE

07.04.2016 GI A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to DIN EN
ISO/IEC 17065:2013 for certification of products for energy and water supply
industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-05

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ <i>type</i>	Technische Daten <i>technical data</i>	Bemerkungen <i>remarks</i>
A 1 - 80 - 1,5, Nr. 490	Druckstufe: PN 16 Nennweite: DN 80	

Ausführungsvariante <i>type variation</i>	Erläuterungen <i>explanations</i>
490F	Flanschanschluss
490PE	PE-Ende für Schweißmuffenverbindung
490S	BAIO®-Spitze

zertifizierte Bauteile / Werkstoffe
certified components

Registr.-Nr. <i>registration no.</i>	Bauteil (Produktart) <i>component</i>	Modell/Typ <i>model/type</i>	Hersteller <i>manufacturer</i>
DV-7705BM0480	Formstücke aus duktilem Gusseisen	BAIO®-System/BAIO®-System	Hawle Armaturen GmbH



CERT

DIN-DVGW-Baumusterprüfzertifikat

DIN-DVGW type examination certificate

NW-6204BL0390

Registriernummer
registration number

Anwendungsbereich <i>field of application</i>	Produkte der Wasserversorgung <i>products of water supply</i>
Zertifikatinhaber <i>owner of certificate</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Vertreiber <i>distributor</i>	Hawle Armaturen GmbH Liegnitzer Straße 6, D-83395 Freilassing
Produktart <i>product category</i>	Armaturen für die Wasserversorgung: Absperrventil (6204)
Produktbezeichnung <i>product description</i>	Keil-Absperrschieber für die Trinkwasserversorgung
Modell <i>model</i>	Typ "E 2"
Prüfberichte <i>test reports</i>	Kontrollprüfung Labor: vom 01.10.2013 (TZW) Mechanikprüfung: A0 017/10 vom 18.08.2010 (TZW) Mechanikprüfung: A0 014/05 vom 13.11.2006 (TZW) KTW-Prüfung: KA 275/11 vom 19.09.2011 (TZW) Mikrobiologische Prüfung: W-211795-11-SI vom 22.12.2011 (WHY)
Prüfgrundlagen <i>test basis</i>	DVGW W 363-(P) (01.06.2010) DIN EN 1074-1 (01.07.2000) DIN EN 1074-2 (01.07.2004) BGA KTW (12.12.1985) UBA KTW (07.10.2008) DVGW W 270 (01.11.2007)
Ablaufdatum / AZ <i>date of expiry / file no.</i>	26.07.2020 / 15-0063-WNV

05.08.2015 GI A-1/2

Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle
date, issued by, sheet, head of certification body

DVGW CERT GmbH ist von der DAkkS nach DIN EN 45011:1998
akkreditierte Stelle für die Zertifizierung von Produkten der Energie- und
Wasserversorgung.

DVGW CERT GmbH is an accredited body by DAkkS according to EN
45011:1998 for certification of products for energy and water supply industry.



Deutsche
Akkreditierungsstelle
D-ZE-16028-01-01

DVGW CERT GmbH
Zertifizierungsstelle

Josef-Wirmer-Str. 1-3
53123 Bonn

Tel. +49 228 91 88 - 888
Fax +49 228 91 88 - 993

www.dvgw-cert.com
info@dvgw-cert.com

Typ type	Technische Daten technical data	Bemerkungen remarks
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 50	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 65	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 80	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 100	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 125	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 150	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 200	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 250	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 300	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 350	
Typ "E 2"	Druckstufe: PN 10/16 Nennweite: DN 400	





qualityaustria

Succeed with Quality



CERTIFICATE

Quality Austria - Trainings, Zertifizierungs und Begutachtungs GmbH awards this **qualityaustria** certificate to the following organisation:

This **qualityaustria** certificate confirms the application and further development of an effective



E. Hawle Armaturenwerke GmbH

A-4840 Vöcklabruck, Wagrainner Straße 13

ENERGY MANAGEMENT SYSTEM

complying with the requirements of standard

ISO 50001:2011

Quality Austria - Trainings, Zertifizierungs und Begutachtungs GmbH is accredited according to the Austrian Accreditation Act by the BMWFV (Federal Ministry of Science, Research and Economy).

Quality Austria is accredited as an organisation for environmental verification by the BMLFUW (Federal Ministry of Agriculture, Forestry, Environment and Water Management).

Quality Austria is authorized by the VDA (Association of the Automotive Industry).

For accreditation registration details please refer to the applicable decisions or recognition documents.

Quality Austria is the Austrian member of IQNet (International Certification Network).



Doc. Nr. QA_34_026

2c69b1d1-a048-4c5c-a89c-298ac7935d0b

incl. site:

A-4890 Frankenmarkt, Hawle Straße 1

Development, production and sales of valves and fittings

The validity of the **qualityaustria** certificate will be maintained by annual surveillance audits and one renewal audit after three years.

Registration No.: 00130/0

Date of initial issue: 27 July 2016

Valid until: 26 July 2019

Vienna, 27 July 2016

Quality Austria - Trainings, Zertifizierungs und Begutachtungs GmbH,
AT-1010 Vienna, Zelinkagasse 10/3



qualityaustria



Konrad Scheiber
General Manager

DI Axel Dick, MSc
Specialist representative

The current validity of the certificate is documented exclusively on the Internet under
<http://www.qualityaustria.com/en/cert> EAC: 14; 17.2; 18



qualityaustria

Succeed with Quality



CERTIFICATE

Quality Austria Trainings-, Zertifizierungs- und Begutachtungs GmbH awards this quality austria certificate to the following organisation:

This **quality** austria certificate confirms the application and further development of an effective



E. Hawle Armaturenwerke GmbH

A-4840 Vöcklabruck, Wagrainer Straße 13

QUALITY MANAGEMENT SYSTEM

complying with the requirements of standard

ISO 9001:2008

Quality Austria Trainings-,
Zertifizierungs und
Begutachtungs GmbH is
accredited according to
the Austrian Accreditation
Act by the BMWFV
(Federal Ministry of
Science, Research and
Economy).

Quality Austria is
accredited as an
organisation for
environmental verification
by the BMLFUW (Federal
Ministry of Agriculture,
Forestry, Environment and
Water Management).

Quality Austria is
authorized by the VDA
(Association of the
Automotive Industry).

For accreditation
registration details please
refer to the applicable
decisions or recognition
documents.

Quality Austria is the
Austrian member of IQNet
(International Certification
Network).

Doc. Nr. IQ-34-002

e1e464e9-55ca-46ab-
b171-7057ad6bda08

incl. site:

A-4890 Frankenmarkt, Hawle Straße 1

Development, production and sales of valves
and fittings

The validity of the **quality** austria certificate will be
maintained via annual surveillance audits and one
renewal audit after three years.

Registration No.: 00545/0

Date of initial issue: 21 August 1995

Valid until: 30 March 2018

Vienna, 31 March 2015

Quality Austria Trainings-, Zertifizierungs- und Begutachtungs GmbH,
A-1010 Vienna, Zelinkagasse 10/3

Konrad Scheiber
General Manager

Eckehard Bauer, MSc
Specialist representative



qualityaustria





qualityaustria

Succeed with Quality



CERTIFICATE

Quality Austria Trainings-, Zertifizierungs- und Begutachtungs GmbH awards this quality austria certificate to the following organisation:

This **quality** austria certificate confirms the application and further development of an effective



E. Hawle Armaturenwerke GmbH

A-4840 Vöcklabruck, Wagrainstraße 13

ENVIRONMENTAL MANAGEMENT SYSTEM

complying with the requirements of standard

ISO 14001:2004

Quality Austria Trainings-, Zertifizierungs und Begutachtungs GmbH is accredited according to the Austrian Accreditation Act by the BMWF (Federal Ministry of Science, Research and Economy).

Quality Austria is accredited as an organisation for environmental verification by the BMLFUW (Federal Ministry of Agriculture, Forestry, Environment and Water Management).

Quality Austria is authorized by the VDA (Association of the Automotive Industry).

For accreditation registration details please refer to the applicable decisions or recognition documents.

Quality Austria is the Austrian member of IQNet (International Certification Network).

Doc. Nr. IQ_34_009

a3a9d04a-0dc8-4be8-8a90-9365b1a77ff1

incl. site:

A-4890 Frankenmarkt, Hawle Straße 1

Development, production and sales of valves and fittings

The validity of the **quality** austria certificate will be maintained via annual surveillance audits and one renewal audit after three years.

Registration No.: 01873/0

Date of initial issue: 7 August 2012

Valid until: 30 March 2018

Vienna, 31 March 2015

Quality Austria Trainings-, Zertifizierungs- und Begutachtungs GmbH,
A-1010 Vienna, Zelinkagasse 10/3



qualityaustria



Konrad Scheiber
General Manager

Ing. Wolfgang Hackenauer, MSc
Specialist representative



Product certificate K6252/05

Issued 2017-07-01

Replaces K6252/04

Page 1 of 3

Plastic service taps for water

STATEMENT BY KIWA

With this product certificate, issued in accordance with the Kiwa Regulations for Product Certification, Kiwa declares that legitimate confidence exists that the products supplied by

E. Hawle Armaturenwerke GmbH

as specified in this product certificate and marked with the Kiwa®-mark in the manner as indicated in this product certificate may, on delivery, be relied upon to comply with Kiwa evaluation guideline BRL-K660/02 "Plastic service taps for water", dated 01-02-2012.

Luc Leroy
Kiwa

Publication of this certificate is allowed.

Advice: consult www.kiwa.nl in order to ensure that this certificate is still valid.

Kiwa Nederland B.V.

Sir Winston Churchilllaan 273
P.O. Box 70
2280 AB RIJSWIJK
The Netherlands
Tel. +31 88 998 44 00
Fax +31 88 998 44 20
info@kiwa.nl
www.kiwa.nl

Company

E. Hawle Armaturenwerke GmbH
Wagrainer Straße 13
4840 VÖCKLABRUCK
Oostenrijk
Tel. +43 7672/725760
Fax +43 7672/78464
e-mail_hawle@hawle.at
www.hawle.at



Certification process
consists of initial and
regular assessment of:

- quality system
- product

Plastic service taps for water

PRODUCT SPECIFICATION

The products mentioned below belong to this product certificate.

connection to the main line	3/4"
connection to the service line	25 mm
flow class	A

connection to the main line	1"
connection to the service line	25 mm
flow class	B

connection to the main line	1"
connection to the service line	1 1/4"
flow class	A

Plastic service taps for water

FITNESS FOR CONTACT WITH DRINKING WATER

This product is approved on the basis of the requirements for hygienic aspects set in the "Regeling materialen en chemicaliën drink- en warm tapwatervoorziening" ("Materials and chemicals in the supply of drinking water and warm tap water Regulation"; published in the Government Gazette).

These hygienic aspects are based on two main criteria. The product shall permanently comply with:

- The product recipe approved during the assessment procedure. This recipe is not to be changed without prior approval by Kiwa according to the Kiwa approval procedure for the hygienic aspects;
- Specific product requirements for the hygienic aspects.

The recipe and specific product requirements are laid down in the for confidentiality reasons undisclosed 'appendix hygienic aspects' to this certificate.

MARKING

The Kiwa[®]-mark products are marked with the word mark "KIWA .

Place of the mark: on the tap body.

Compulsory specifications:

- manufacturer's name and / or registered trademark;
- the outer diameter, in mm, of the associated tube;
- the flow class;
- the connection size of the main line.

Method of marking:

- non-erasable;
- visible after assembly.

APPLICATION AND USE

Plastic service taps are intended for use in underground connections on PE pipes for drinking water. The pipes to be used must comply with NEN 7116.

The recommended limits for proper operation are a working pressure between 100 and 500 kPa and a water temperature of up to 30 °C. The plastic service taps can be used for tap water applications with a working pressure of up to 1000 kPa.

RECOMMENDATIONS FOR CUSTOMERS

Check at the time of delivery whether:

- the supplier has delivered in accordance with the agreement;
- the mark and the marking method are correct;
- the products show no visible defects as a result of transport etc.

If you should reject a product on the basis of the above, please contact:

- E. Hawle Armaturenwerke GmbH
and, if necessary,
- Kiwa Nederland B.V.

Consult the supplier's processing guidelines for the proper storage and transport methods.

Product certificate K65186/04

Issued 2016-12-15

Replaces K65186/03

Page 1 of 4

Wide range fittings of ductile cast iron

STATEMENT BY KIWA

With this product certificate, issued in accordance with the Kiwa Regulations for Product Certification, Kiwa declares that legitimate confidence exists that the products supplied by

E. Hawle Armaturenwerke GmbH

as specified in this product certificate and marked with the Kiwa®-mark in the manner as indicated in this product certificate may, on delivery, be relied upon to comply with

Kiwa evaluation guideline BRL-K775 "Ductile cast iron joints for pipes of nodular cast iron, grey cast iron, steel, PVC U, PE or fibre cement",

which covers the requirements of

EN 14525: "Nodular cast iron fittings and transition pieces with flanges for use with pipes of different materials: ductile iron, gray iron, steel, PVC-U, PE and fibre cement".



Bouke Meekma
Kiwa

Publication of the certificate is allowed.

Advice: consult www.kiwa.nl in order to ensure that this certificate is still valid.

Wide range fittings of ductile cast iron

Kiwa Nederland B.V.

Sir Winston Churchilllaan 273
P.O. Box 70
2280 AB RIJSWIJK
The Netherlands

Tel. +31 70 414 44 00

Fax +31 70 414 44 20

info@kiwa.nl

www.kiwa.nl

Supplier

E. Hawle Armaturenwerke GmbH
Wagrainer Straße 13
4840 VÖCKLABRUCK
Austria
Tel. +43 767 272 576 285
Fax +43 7672/78464

Wide range fittings of ductile cast iron

PRODUCT SPECIFICATION

The products mentioned below belong to this certificate.

7974 (Synoflex Connector):

- Type 7974: PFA 16, DN 80-65 , 100-80; DN 150, DN200, DN 225, DN 250 and DN 300,
- Type 7974: PFA 10; DN 350 and DN 400.

7994 (Synoflex Flange):

- Type 7994: PFA 16, DN 80-65, DN 80-100, DN100-80, 100-125,;
- Type 7994: PFA 10; DN 350 and DN 400.

7975 (SYNO2000 Connector):

- Type 7975, PFA 16, DN 50/63, DN 80/90, DN 100/110, DN 100/125, DN 150/160, DN 150/180, DN 200/200, DN 200/225, DN 250/250, DN 250/280.

Wide range fittings of ductile cast iron

APPLICATION AND USE

The products are intended to be applied in piping systems for the transport of drinking water with a nominal size of DN 40 up to and including DN 600 with a maximum water pressure 1 MPa and water temperature of 30°C.

TOXICOLOGICAL REQUIREMENTS

Approval:

This product is approved on the basis of the requirements set in the "Regeling materialen en chemicaliën leidingwatervoorziening" ("Regulation Materials and Chemicals for Drinking Water Supplies"); published in the "Staatscourant" (Government Gazette).

ATA criteria:

The ATA product certification is based on two main criteria. It should permanently comply with:

- The product recipe approved during the assessment procedure. This recipe is laid down in, for confidentiality reasons, the undisclosed appendix to the Kiwa certificate K65186. This recipe is not to be changed without prior approval by Kiwa, according to the Kiwa-ATA-approval procedure;
- Specific ATA-product requirements have been laid down in the appendix to the Kiwa certificate K65186. For confidentiality reasons, this appendix is not public.

MARKING

The Kiwa[®]-mark products are marked with the word mark "KIWA"  the abbreviated work mark .

Place of the mark:

- on the fitting.

Compulsory specifications:

- manufacturer's name or logo;
- the last two digits of the production year;
- material specification;
- external diameter (in mm) range of the piping with which the coupling can be used;
- nominal pressure.

Method of marking:

- non-erasable;
- visible after assembly.

RECOMMENDATIONS FOR CUSTOMERS

Check at the time of delivery whether:

- the supplier has delivered in accordance with the agreement;
- the mark and the marking method are correct;
- the products show no visible defects as a result of transport etc.

If you should reject a product on the basis of the above, please contact:

- E. Hawle Armaturenwerke GmbH
- and, if necessary,
- Kiwa Nederland B.V.

Consult the supplier's processing guidelines for the proper storage and transport methods.



Certificate

Product certificate K78328/03



Issued 2016-02-15

Replaces K78328/02

Page 1 of 3

Ductile cast iron fittings for PVC-U and PE piping systems

STATEMENT BY KIWA

With this product certificate, issued in accordance with the Kiwa Regulations for Product Certification, Kiwa declares that legitimate confidence exists that the products supplied by

Fabryka Armatury Hawle Spółka z o.o.

as specified in this product certificate and marked with the Kiwa®-mark in the manner as indicated in this product certificate may, on delivery, be relied upon to comply with Kiwa evaluation guideline BRL-KK773 "Ductile cast iron fittings for PVC-U and PE piping systems" dated 08-09-2014.

which covers the requirements of

EN 12842: "Ductile iron fittings for PVC-U or PE piping systems - Requirements and test methods".

Luc Leroy
Kiwa

Publication of the certificate is allowed.

Advice: consult www.kiwa.nl in order to ensure that this certificate is still valid.

Kiwa Nederland B.V.
Sir Winston Churchilllaan 273
Postbus 70
2280 AB RIJSWIJK
The Netherlands

Tel. +31 88 998 44 00
Fax +31 88 998 44 20
info@kiwa.nl
www.kiwa.nl



Supplier

Fabryka Armatury Hawle Spółka z o.o.
Ul. Piaskowa 9
62-028 KOZIEGLOWY
Poland
Tel. +61 8111 409
Fax +61 8111413
info@hawle.pl
www.hawle.pl

Certification process
consists of initial and
regular assessment of:

- quality system
- product

Ductile cast iron fittings for PVC-U and PE piping systems

PRODUCT SPECIFICATION

The products mentioned below belong to this technical approval-with-product certificate

System 2000

Type of fitting	Article Number	Range
Flanges	0400	DN50/63 – DN200/225
Connectors	0430	63 - 225 mm
All socket tees (MMB fittings)	8515	63 - 225 mm
Double socket tees with flanged branch (MMA fittings)	8525	63 - 225 mm
Bends 90°	8535	63 - 225 mm
Bends 45°	8545	63 - 225 mm
Bends 30°	8555	90, 110, and 160 mm
Bends 11°	8557	90 - 110 mm
End caps	8075	63 - 225 mm
Duckfoot bends	5075	DN80-100 (63 – 110 mm)

REMARK: The products listed above can be used with an allowable operating pressure (PFA) of up to and including 16 bar.

Hygienic aspects

Approval:

This product is approved on the basis of the requirements set in the "Regeling materialen en chemicaliën drink- en warm tapwatervoorziening" ("Materials and chemicals in the supply of drinking water and warm tap water Regulation"; published in the Government Gazette).

Criteria hygienic aspects:

The hygienic aspects are based on two main criteria. The product shall permanently comply with:

- The product recipe approved during the assessment procedure. The recipe is laid down in the for confidentiality reasons undisclosed 'appendix hygienic aspects' to certificate K78328. This recipe is not to be changed without prior approval by Kiwa according to the Kiwa approval procedure for the hygienic aspects;
- Specific product requirements for the hygienic aspects, laid down in 'appendix hygienic aspects' to certificate K78328. For confidentiality reasons this appendix is not public.

MARKING

The Kiwa[®]-mark products are marked with the word mark "KIWA"  of .

Place of the mark:

- on the fitting.

*) for small fittings marking with only KK is permitted

Compulsory specifications:

- manufacturer's name or logo;
- the last two digits of the production year;
- material specification;
- external diameter (in mm) range of the piping with which the coupling can be used;
- nominal pressure.

Method of marking:

- Non-erasable;
- visible after assembly.

APPLICATION AND USE

The products are intended to be applied in piping systems for the transport of drinking water met de nominal size of DN 40 up to and including DN 700 with a with a maximum water pressure 1 MPa and water temperature of 30°C.

Ductile cast iron fittings for PVC-U and PE piping systems

RECOMMENDATIONS FOR CUSTOMERS

Check at the time of delivery whether:

- the supplier has delivered in accordance with the agreement;
- the mark and the marking method are correct;
- the products show no visible defects as a result of transport etc.

If you should reject a product on the basis of the above, please contact:

- Fabryka Armatury Hawle Spółka z o.o.

and, if necessary,

- Kiwa Nederland B.V.

Consult the supplier's processing guidelines for the proper storage and transport methods.

product certificate
K82446/01

Issued 2014-05-01

Replaces

Page 1 of 3

Butterfly valves

STATEMENT BY KIWA

With this product certificate, issued in accordance with the Kiwa Regulations for Product Certification, Kiwa declares that legitimate confidence exists that the products supplied by


E. Hawle Armaturenwerke GmbH

complying with the technical specifications as laid down in this product certificate and marked with the Kiwa®-mark in the manner as indicated in this product certificate, on delivery, may be relied upon to comply with

Kiwa evaluation guideline BRL-K602/04: "Valves and other accessories for drinking water transport and drinking water distribution systems"

which covers the requirements of

EN 1074/2:2000 "Valves for water supply - Fitness for purpose requirements and appropriate verification tests - Part 2: Isolating valves". "".



Bouke Meekma
Kiwa

Publication of the certificate is allowed.

Advice: consult www.kiwa.nl in order to ensure that this certificate is still valid.

Kiwa Nederland B.V
Sir W. Churchill-laan 273
Postbus 70
2280 AB RIJSWIJK
The Netherlands

Tel. +31 70 414 44 00
Fax +31 70 414 44 20
E-mail info@kiwa.nl
www.kiwa.nl

Supplier

E. Hawle Armaturenwerke GmbH
Wagrainer Straße 13
4840 VÖCKLABRUCK
Austria
Tel. +43 7672 725760
Fax +43 7672/78464
Email:
www.hawle.at

**Certification process
consists of initial and
assessment inspection
of:**

- quality system
- product

Butterfly valves

Product specification

The products mentioned below belong to this certificate

Type 9881 and Type 9881K, PN 10 and PN16, manually operated

DN 150
DN 200
DN 250
DN 300
DN 350
DN 400
DN 450
DN 500
DN 600
DN 700
DN 800
DN 900
DN 1000
DN 1100
DN 1200

Application and use

Butterfly valves are designed to, both underground and overground, be used in pipes for drinking water or raw material for drinking water, with a maximum medium temperature of 30 °C. The valves are designed to open or shut off the pipes and not for regulation purposes.

Toxicological requirements

Approval:

This product is approved on the basis of the requirements set in the "Regeling materialen en chemicaliën watervoorziening" (Regulation materials and chemicals drinking water and warm tap water supply"; published in the Government Gazette).

ATA criteria:

The ATA product certification is based on two main criteria. It shall permanently comply with:

- The product recipe approved during the assessment procedure. The recipe is laid down in the for confidentiality reasons undisclosed appendix ATA to certificate K82446 This recipe is not to be changed without prior approval by Kiwa according to the Kiwa-ATA-approval procedure;
- Specific ATA-product requirements, laid down in appendix ATA to certificate K82446. For confidentiality reasons this appendix ATA is not public.

Marking

The Kiwa[®]-mark products are marked with the word mark "KIWA" together with  or the abbreviated word mark 
The fittings shall be provided with at least the following marks:

Compulsory specifications:

- name or mark of manufacturer: on the body or specification plate;
- identification of the shell material(s): on the body or specification plate;
- nominal size "DN ...": on the body or specification plate;
- nominal working pressure "PN ...": on the body or specification plate;
- identification of the year of manufacture: on the body or specification plate.

Method of marking:

- Non-erasable;
- visible after assembly.

RECOMMENDATIONS FOR CUSTOMERS

Check at the time of delivery whether:

Butterfly valves

- the supplier has delivered in accordance with the agreement;
- the mark and the marking method are correct;
- the products show no visible defects as a result of transport etc.

If you should reject a product on the basis of the above, please contact:

- E. Hawle Armaturenwerke GmbH

and, if necessary,

- Kiwa Nederland B.V.

Consult the supplier's processing guidelines for the proper storage and transport methods.

Number	K 42226/02	Replaces	K 42226/01
Issued	2009-03-20	Dated	2006-04-01
Valid until	n.a.		

product certificate

Ductile iron fittings for PVC-U or PE piping systems.

Based on pre-certification tests as well as periodic inspections by Kiwa, the products referred to in this certificate and marked with the Kiwa-mark as indicated under 'Marking', supplied by

E. Hawle Armaturenwerke GmbH

may, on delivery, be relied upon to comply with the Kiwa evaluation guideline

BRL-K773/01 "ductile iron fittings for PVC-U or PE piping systems."

As well as

EN 12842-03-200: "Ductile iron fittings for PVC-U or PE piping systems - Requirements and test methods"

B. Mehlme

This certificate is issued in accordance with the Kiwa-Regulations for Product Certification.

Kiwa N.V.
Sir W. Churchill-laan 273
Postbus 70
2280 AB RIJSWIJK
The Netherlands

Tel. +31 70 414 44 00
Fax +31 70 414 44 20
E-mail info@kiwa.nl
www.kiwa.nl

Company

E. Hawle Armaturenwerke GmbH
Wagrainer Straße 13
4840 VÖCKLABRUCK
Austria
T (+43) 7672/725760
F (+43) 7672/78464
E
I www.hawle.at

Page	2	Number	K 42226/02	Replaces	K 42226/01
		Issued	2009-03-20	Dated	2006-04-01
		Valid until	n.a.		

ductile iron fittings for PVC-U or PE piping systems.

PRODUCT SPECIFICATION

General

- The applied rubber collars are in compliance with EN 681-1 and approved to be in contact with drinking water
- Lubricants are not applied
- The applied epoxy coating is in compliance with the GSK requirements and provided with an Attestation for Toxicological Aspects

Product specification

Fittings to connect piping systems of PVC-U and PE up to a maximum of pressureclass of PN 16

Type Fitting	Diameter range tube [mm]
U-stuk	63-355
MMA-stuk	63-225
MMB-stuk	63-225
Bocht 90°	63-315
Bocht 45°	63-315
Bocht 30°	63-315
Bocht 11°	90-160
Eindkap	63-315
Voetbocht (DN80 + 100)	63-110
E-Stuk (DN50-400)	63-415

Page	3	Number	K 42226/02	Replaces	K 42226/01
		Issued	2009-03-20	Dated	2006-04-01
		Valid until	n.a.		

APPLICATION AND USE

The products are intended to be applied as coupling elements for PVC-U and PE pipes for the transport of drinking water and waste water

MARKING

The products are marked with the Kiwa-mark and the certificate number.

Place of the mark: outside of the fitting

Compulsory specifications:

- manufacturer's name of mark;
- identification of the year of manufacture;
- identification of the ductile iron;
- the dn an/or DN as relevant;
- the PN rating of flanges when applicable;
- the reference to this standard;
- "PVC" or/and/PE.

Method of marking:

- Kiwa mark with certificate number on the outside of the coupling
 - The first 5 marks shall be cast-on or cold stamped.
-

RECOMMENDATIONS FOR CUSTOMERS:

1. Check at the time of delivery whether:
 - 1.1 the producer has delivery in accordance with the agreement;
 - 1.2 the mark and the marking method are correct;
 - 1.3 the products show no visible defects as a result of transport etc.
 2. If you should reject a product on the basis of the above, please contact:
 - 2.1 E. Hawle Armaturenwerke GmbH
and, if necessary,
 - 2.2 Kiwa N.V.
 3. Consult the producer's processing guidelines for the proper storage and transport methods.
 4. Check whether this certificate is still valid by consulting www.kiwa.nl
-