

# MAINPRESS

## - Pressing dimension 63 with pressing jaws

MAINPRESS multilayer composite pipe 63, is being pressed with the new press jaws without the need of adapter jaws.




Open the press jaws by pushing the axle stub between thumb and index finger.



For a correct position of the press jaws on the fitting, the outer jaws pair encloses the fitting fully.



Subsequently, the pressing machine, with the third lower press jaws part, is brought into contact with the sleeve by pushing the fitting towards the machine. The fitting is then enclosed by all three parts of the press jaws.

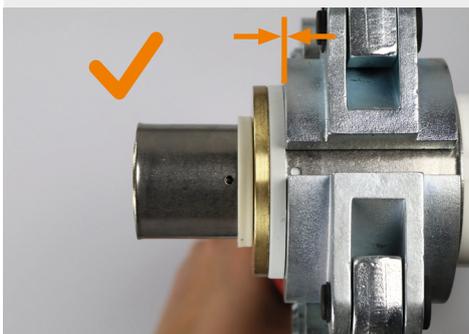

It is important to ensure that all three parts of the press jaws are rectangular and flush to the fitting.

After finishing the press procedure the fitting needs to be pulled out of the jaws again, so that the outer jaws pair is in its initial position (first picture)