


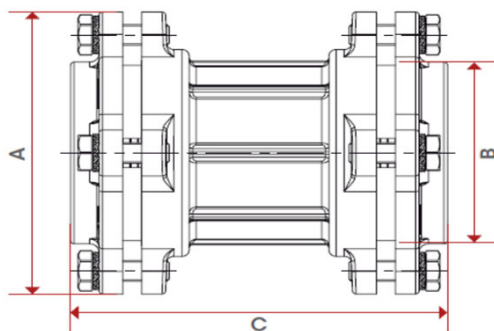

MATERIALS

BODY: Brass CW617N

FLANGE: Brass CW617N

NUT: Stainless steel AISI 304

SCREW: Stainless steel AISI 304

For sizes 75 & 90 mm: CONICAL SEAL: NBR

FASTENER RING: polyoxymethylene (POM)

For size 110 mm: O-RING: Nbr


FASTENER RING: Brass CW617N

PUSH-O-RING: Stainless steel AISI 304

ART. 4005 Coupling fitting with flanges for PE pipe

Misura Size	DN	A	B	C
75	65	144	77	100
90	80	163	92	110
110	100	180	130	221

TECHNICAL DATA:	
Max Working pressure:	25 bar
Working temperature:	-15° +110°C
Threads:	UNI ISO 228/1
For high and low density PE pipes	
Tests conforming to:	
UNI EN 1254-3:2000 (UNI EN 712, 713, 715)	

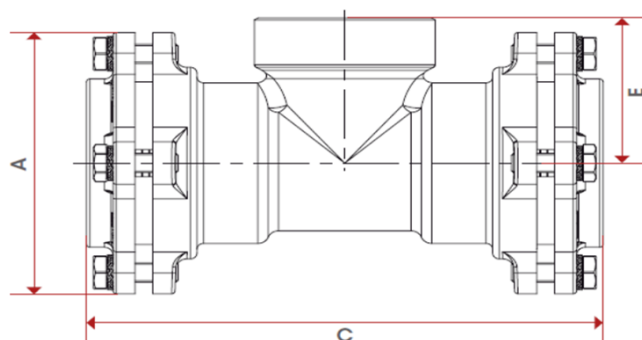

MATERIALS

BODY: Brass CW617N

FLANGE: Brass CW617N

FASTENER RING: Brass CW617N

O-RING: Nbr

PUSH-O-RING: Stainless steel AISI 304

SCREW: Stainless steel AISI 304

NUT: Stainless steel AISI 304

ART. 4006 T female fitting with flanges for PE pipe

Misura Size	DN	A	C	E
75	65	135	226	75
90	80	154	259	85
110	100	180	314	100

TECHNICAL DATA:	
Max Working pressure:	25 bar
Working temperature:	-15° +110°C
Threads:	UNI ISO 228/1
For high and low density PE pipes	
Tests conforming to:	
UNI EN 1254-3:2000 (UNI EN 712, 713, 715)	