


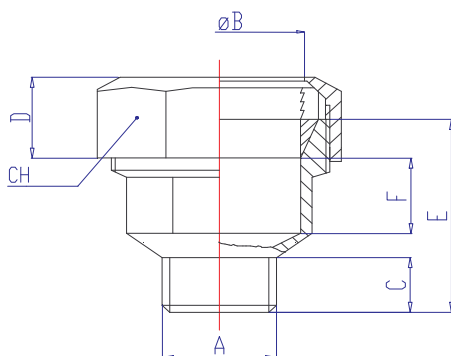

MATERIALS

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE
COMPONENT
ONLY!!**

ART. 4303

Reduced straight male fitting for PE pipe

QUICK CONNECTION

Misura	A	B	C	D	E	F	CH
25	1/2"	26	12,4	19	44	15	41
32	3/4"	33	13,5	22	48	17	51
40	1"	42	14	24	54	22	59
50	1,1/4"	52	19	25,6	64	27	70

TECHNICAL DATA:

Max Working pressure: **25 bar**


Working temperature: **-15° +110°C**

Threads: **UNI ISO 228/1**

For high and low density PE pipes

Tests conforming to:

UNI EN 1254-3:2000 (UNI EN 712, 713, 715)

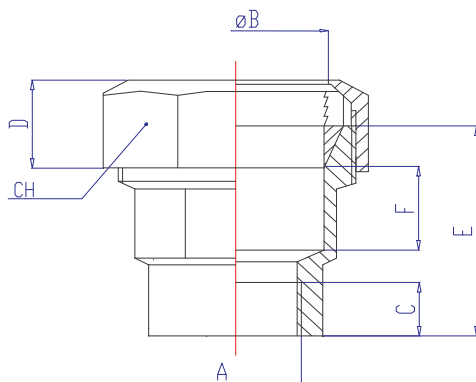

MATERIALS

BODY: Brass CW617N-UNIEN12165

NUT: Brass CW617N-UNIEN12165

FASTENER RING + CONICAL SEAL: polyamide + NBR

**ONE
COMPONENT
ONLY!!**

ART. 4304

Reduced straight female fitting for PE pipe

QUICK CONNECTION

Misura	A	B	C	D	E	F	CH
25	1/2"	26	12	19	44	15	41
32	3/4"	33	13	22	48	17	51
40	1"	42	14	24	54	22	59
50	1,1/4"	52	20,7	25,6	64	27	70

TECHNICAL DATA:

Max Working pressure: **25 bar**

Working temperature: **-15° +110°C**

Threads: **UNI ISO 228/1**

For high and low density PE pipes

Tests conforming to:

UNI EN 1254-3:2000 (UNI EN 712, 713, 715)