

ISO pipe fitting

T-piece | Fitting | End stop

Order No.	Ø Pipe 1	Ø Pipe 2	Ø Pipe 3	MOP (PN)	L	E1	E2	E3	Weight
6551	40	63	40	16	246	88	115	88	1,18
	63	40	40		272	115	88	88	1,18
	63	40	63		297	115	88	115	1,23
	63	63	40		272	115	115	88	1,23

Design features

- With external thread according to EN 10226-1
- With external thread for protective sleeve according to EN 10226-1

Order No.	Ø Pipe	Thread 1	Thread 2	MOP (PN)	L	E	Ø D	Weight
6901	32	1"	1½"	16	88	63	53	0,40
	40	1¼"	2"		104	76	64,5	0,70
	50	1½"	2½"		120	91	76	1,10

Order No.	Ø Pipe	MOP (PN)	L	E	Ø D	Weight
6223	20	16	54,5	48,5	39	0,04
	25		65,5	58,5	43	0,06
	32		75,0	70,0	53	0,09
	40		92,5	82,5	72	0,20
	50		107	101	83	0,28
	63		117	111	99	0,40


Design features

- With one external thread outlet EN 10226-1
- Made of POM
- Every push-fit end can be modified to a external thread outlet

Order No.	DN	Thread	L	Weight
6630	¾"	¾"	92	0,05
	1"	1"	105	0,10
	1¼"	1¼"	123	0,13
	1½"	1½"	144	0,18
	2"	2"	160	0,28
6631	1"	1½"	117	0,07
	1"	2"	126	0,12


T-piece reduced With 3 sockets

No. 6551 Made of POM

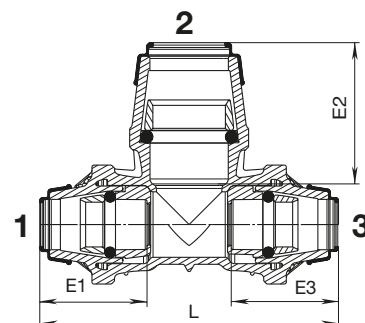


Fitting For wall inlet fitting No. 690 (old version)

No. 6901 Made of ductile iron

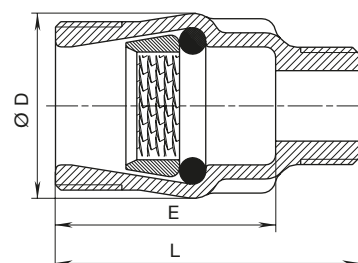

End stop

No. 6223 Made of POM



Push fit swivel converter

No. 6630 equal

No. 6631 special dimensions

