ACO grease capture

Product information for the product group

ACO Product benefits

- Automatic fats, oils and grease removal into waste container
- Simple to install
- Protect inner building pipes from fats, oils and grease blockages
- Very easy to maintain
- Hygienic made from Stainless Steel
- Overflow protection
- Separation process improvement by addition of food debris removal basket

- Compact one-piece construction made from stainless steel
- Inbuilt flow reducer
- Movable inlet and outlet
- Canister or gastro container








Item Technical Data 418502.05.23.C2

Model name	Flow rate	Contents		Weight		Voltage	Plug type	Power supply	Inlet & out- let connec- tion type
		Silt basket	Grease col- lection box	Empty	Full				
	[l/s]	[1]	[I]	[kg]	[kg]				
GC50	0.5	4.8	2.3	25	58	230V/50Hz	CEE7/7	600W, 2.6A	48-60mm)

For more information please visit: https://www.buildingdrainage.aco/products



Dimensions

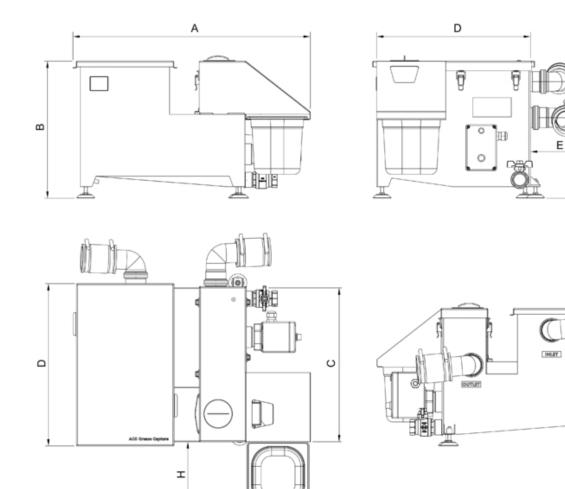

	Descrip- tion	Dimensions								Shipping dimensions		
		Α	В	С	D	E	F	G	Н	I	w	h
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
418502.05.23.CLC50		618	357	400	422	150	209	303	176	350	510	680

For more information please visit: https://www.buildingdrainage.aco/products c

ш

I

