

# Complete gullies Easyflow, DN 50


## Product information for the product group

### ACO Product benefits

- Retrofit clamping flange
- Optimum cleaning option
- Adjustable height thin bed seal
- Retrofit fire protection

### Fire protection



Fire resistance class R30 – R120 tested according AbZ: Z-19.17-1887

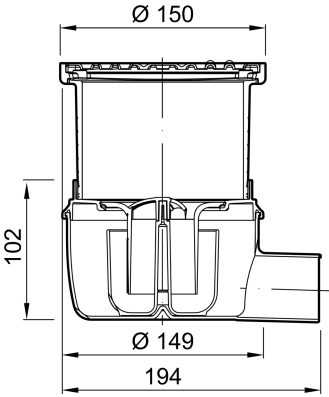




## Item Technical Data 2500.05.77

Nominal width	Version	Side inlet	Recess [mm]	Flow rate [l/s]	Height- adjustability [mm]	Weight [kg]
DN 50	Standard	Without lateral inlet	200 x 260	1.0	15 – 96	0.9

## Accessories

Description	Used with	Weight	PU	Item number
		[kg]	[piece]	
 <b>Extension</b> <ul style="list-style-type: none"><li>■ Made of plastic</li><li>■ Suitable for taking plastic top sections and clamping flanges</li><li>■ With lip seal</li><li>■ For deeper installation of floor gullies</li></ul>	<ul style="list-style-type: none"><li>■ All Easyflow floor drains</li><li>■ Top sections<ul style="list-style-type: none"><li>□ Socket diameter 125 mm</li></ul></li><li>■ Walk-in with gully sockets</li></ul>	0.3		2040.00.00
 <b>Thin-bed flange</b> <ul style="list-style-type: none"><li>■ Plastic flange with sprayed-on fleece</li><li>■ Suitable for taking liquid sealants added on-site using thin bed process</li></ul>	<ul style="list-style-type: none"><li>■ All Easyflow top sections<ul style="list-style-type: none"><li>□ 2500.77.11</li><li>□ 2700.77.11</li><li>□ 2700.77.12</li></ul></li><li>■ Top section with socket diameter 125 mm</li></ul>	0.2		2040.00.01

	Description	Used with	Weight	PU	Item number
			[kg]	[piece]	
	<b>Thin-bed flange</b> <ul style="list-style-type: none"> <li>■ Flange made of plastic with sprayed on non-woven material</li> <li>■ Suitable for holding liquid seals applied on site using the thin bed method</li> </ul>	<ul style="list-style-type: none"> <li>■ All Easyflow top sections <ul style="list-style-type: none"> <li>□ 2500.77.11.</li> <li>□ 2700.77.11</li> <li>□ 2700.77.12</li> </ul> </li> <li>■ Top sections with socket diameter: 125 mm</li> </ul>	0.2	4	679945
	<b>Compressed seal flange</b> <ul style="list-style-type: none"> <li>■ Plastic flange</li> <li>■ Loose flange made from stainless steel</li> <li>■ Suitable for taking sealants foils added on-site for sealing layers for point drainage</li> </ul>	<ul style="list-style-type: none"> <li>■ All Easyflow floor drains</li> </ul>	0.6		2040.00.02
	<b>Odour stop</b> <ul style="list-style-type: none"> <li>■ Prevents unpleasant odours from the sewage system, irrespective of the water seal height</li> </ul>	<ul style="list-style-type: none"> <li>■ Floor gullies, Easyflow <ul style="list-style-type: none"> <li>□ Standard</li> <li>□ DN 50</li> </ul> </li> </ul>	0.1		2000.00.06

You can find further accessories under → <https://www.buildingdrainage.aco/search/?q=2500.05.77>