



ACO hygienic ladder grating

Product information

ACO Product benefits

- Fully inspectable and cleanable
 - Full drainability
 - Internal radii equal or larger than 3 mm
 - Fully welded hygienic joints
 - Fully electropolished
-
- BIM models are available in ACO Building Drainage BIM Revit libraries
 - Hygienic design following EN 1672, EN ISO 14159 and EHEDG document 8, 13 and 44
 - Certified according to EN 1253-1
 - Available in 1.4301 (304) or 1.4404 (316L) grades of stainless steel
 - Slip resistance R11 (DIN 51130)
 - Available for load classes R 50, M 125 or N 250
 - Available for all standard ACO box channel widths. See the cladding table for amount of gratings needed to fill specific channel

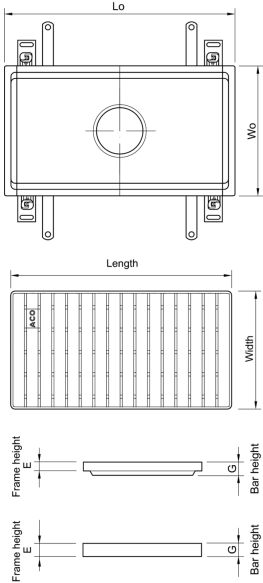

Item Technical Data 416803

Grating dimensions			Class	Material
Size	Frame height (E)	Bar height (G)		
[mm]	[mm]	[mm]		
168 x 499	20	20	R 50	1.4404