

Dedicated clips for plastic pipes with low friction TPE (ThermoPlastic Elastomer) lining.  
The BSK-I clip has easily removable plastic spacers between the two clip halves and can be transformed into a clenching clip without the need for tools.

### Advantages



- Special TPE lining with excellent low friction properties.
- Transformable from sliding to clamping with easily removable spacer.
- Fast assembly thanks to the patented click-spring locking system.
- UV resistant.


### Technical Specifications

- Noise reduction: 20 dB(A) with spacer, 18 dB(A) without spacer.
- Electrolytically zinc plated.
- Equipped with screws with Pozidriv 2 head.



Description	Flamco BSK-I clip M10 x 110	
Order Code	37363	
GTIN	08712874373631	
Model	<u>BSK-I Clips</u>	
Ø Pipe ext. dia. [mm]	110	
Strip dimensions [mm]	28 × 2.5	
Connection	M 10	
Max. working load [N]	2000	
Dimensions	A [mm]	157
	B [mm]	61
	C [mm]	10

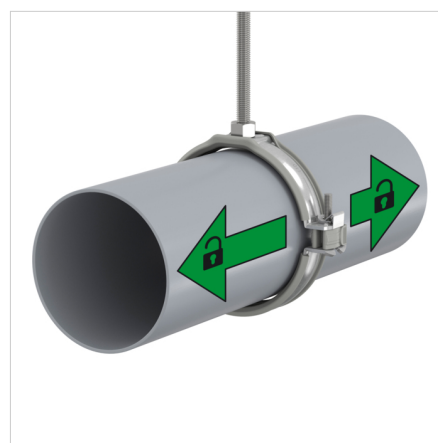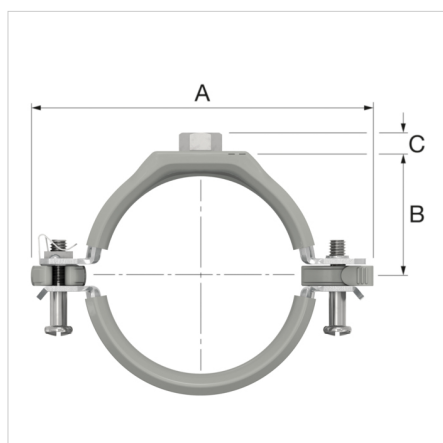

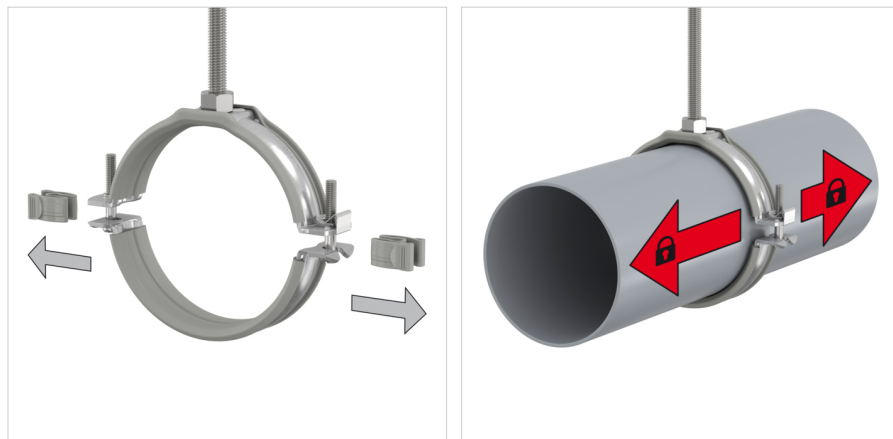

### Classification General Data

Etim Group	Fasteners
Etim Class	Two-piece bracket round
Product Name	FlamcoFix BSK-I clip M10 x 110 mm
Brand	Wemefa
Product Type	Clips for Plastic Pipes
Order Code	37363
GTIN	08712874373631

### Attributes

Material	Steel
Material quality	Other
Surface protection	Galvanic/electrolytic zinc plated
Layer thickness surface protection	13 Micrometre
Nominal diameter	Other
Outer pipe diameter	110 - 110 mm
Inlay	Rubber
Inlay damping value	20 Decibel A weighted
Permitted net load	2000 Newton
Connection facility	Internal thread
Connection size, connection facility	M10
Lock facility	Single click
Suitable for number of pipes	1
Width	157 Millimetre
Height	132 Millimetre
KIWA certified	No
Depth	28 Millimetre
Permitted by NCP	No
FM quality mark	No
UL quality mark	No
VdS quality mark	No
ULC quality mark	No
LPCB quality mark	No
Suitable for steel tube	No
Suitable for stainless steel tube	No
Suitable for copper tube	No
Suitable for aluminium tube	No
Suitable for cast iron pipe	No
Suitable for plastic tube	Yes
Suitable for pipe coil	No
Max. medium temperature (continuous)	100 Degrees celsius
Min. medium temperature (continuous)	-20 Degrees celsius

Find more information online:

Packaging data

Washway Lane  
UK-WA10 6PB, St Helens, Merseyside - gb

T +44 17 447 447 44  
E [uk.info@aalberts-hfc.com](mailto:uk.info@aalberts-hfc.com)  
I [flamcogroup.com/uk-en](http://flamcogroup.com/uk-en)