

Specially designed for sealed solar installations.

Prescor safety valves have a special shape which, not only achieves a perfect seal, but also provides a large blow off capacity. The valve seal is made of high quality rubber which is heat resistant to 140 °C and where the hardness of the rubber adjusts to the set pressure of the safety valve. In this way, the valve cannot stick to the seat.

All valves are tested before they leave our facility and are available for heating and cooling installations as well as for protection of various hot water storage appliances. For safety valves for potable water installations see "Accessories for Sanitary Installations".

### Advantages



- Specially designed pop action for full discharge at opening pressure to reduce the pressure quickly.
- High quality materials and state-of-the-art design features guarantee a high degree of safety.
- CE-conformity mark (PED 2014/68/EU), for application areas according to Pressure Equipment Directive.
- The opening pressure of all valves is individually tested.

### Technical Specifications

- Minimum/Maximum working temperature: -30 °C / 120 °C.
- Peak load: 160 °C.
- Suitable for addition of glycol-based anti-freeze up to 50%.



Description		Prescor Solar valve 1/2 x 3/4-6bar
Order Code		28311
GTIN		08712874283114
Model		<u>Prescor Solar</u>
Set pressure [bar]		6.0
Connection	A	Rp 1/2"
	B	Rp 3/4"
Dimensions	C [mm]	75
	D [mm]	54
	F [mm]	26.5
	G [mm]	34.5
Heating capacity [kW]		50

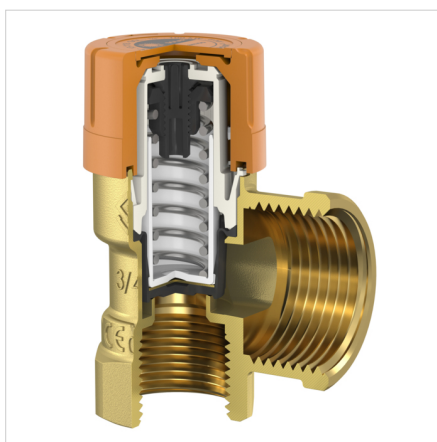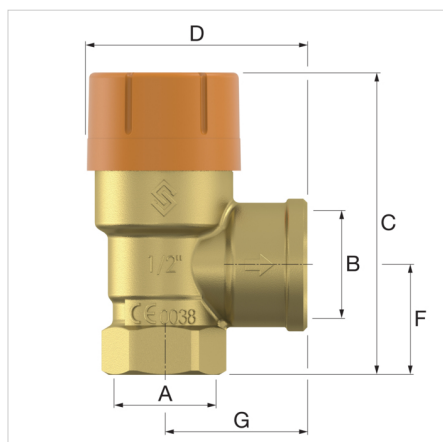

### Classification General Data

Etim Group	Measuring and control devices
Etim Class	Safety valve
Product Name	Prescor Solar Rp $\frac{1}{2}$ " x Rp $\frac{3}{4}$ " 6.0bar
Brand	FLAMCO
Product Type	Prescor Safety Valves
Order Code	28311
GTIN	08712874283114

### Attributes

Model	Right-angled
Housing material	Brass
Housing material	Brass
Material quality	CuZn40Pb2 (CW617N)
Nominal diameter	1/2 inch (15)
Outer pipe diameter all connections	28 Millimetre
Connection 1	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)
Nominal diameter connection 1	1/2 inch (15)
Outer pipe diameter connection 1	21.3 Millimetre
Connection 2	Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1)
Nominal diameter connection 2	3/4 inch (20)
Article compression class	PN 16
Flange compression class	PN 16
Maximum pressure at 20 C	10 Bar
Max. operating pressure at 20 °C	10 Bar
Max. medium temperature (continuous)	160 Degrees celsius
Medium temperature (continuous)	0 - 160 °C
Min. medium temperature (continuous)	-30 Degrees celsius
Surface protection	Untreated
Right-angled model	Yes
Bellows seal	Yes
Sealing	Ethylene-propylene diene monomer rubber (EPDM)
Overflow pressure	5.6 - 6.2 bar
Suitable for continuous operation	Yes
Length of connection 1	26.5 Millimetre
Working length connection 1	26.5 Millimetre
Length of connection 2	34.5 Millimetre
Working length connection 2	34.5 Millimetre
Height	75 Millimetre
Angle of the device	90 Degrees
Spindle angle	180 Degrees
Suitable for heating	No
Suitable for cooling	No
Suitable for solar heating	Yes
Suitable for hot tap water	No

### Find more information online:

[Installation and operating instructions \(multiple languages\)](#)

[CE declaration](#)

[TÜV certificate](#)

[Declaration of conformity UKCA](#)

[Prescor Solar ADSK](#)

[Prescor Solar ADSK Revit](#)

[Prescor Solar DWG](#)

[Prescor Solar STEP](#)

[Packaging data](#)

Washway Lane  
UK-WA10 6PB, St Helens, Merseyside - gb

T +44 17 447 447 44  
E [uk.info@aalberts-hfc.com](mailto:uk.info@aalberts-hfc.com)  
I [flamcogroup.com/uk-en](http://flamcogroup.com/uk-en)