


Product Data Sheet (2017-05-19)

BES Pipe Hangers

BES pipe hangers are designed for mounting sprinkler system pipes to the ceiling.

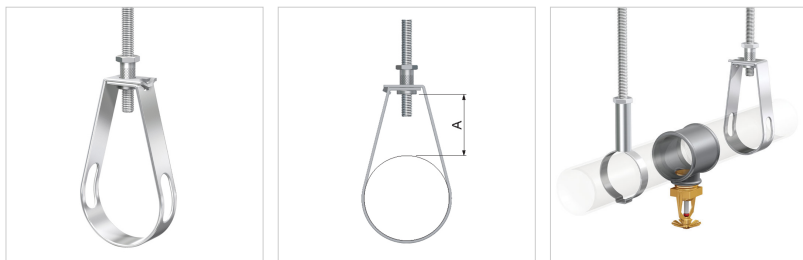

Type	Ø Pipe		Connection	Approval			Min. test failure load*			Strip dimensions [mm]	Adjustment A [mm]		Order Code
	Ext. dia. [mm]	Nom. ["]		UL	FM	VdS	UL [N]	FM [N]	VdS [N]				
BES 8 x 3/4	26.9	3/4"	M 8	-	-	☑	-	-	4000	25 x 1.5	35	50	35753
BES 8 x 1	33.7	1"	M 8	-	-	☑	-	-	4000	25 x 1.5	35	50	35754
BES 8 x 1 1/4	42.4	1 1/4"	M 8	-	-	☑	-	-	4000	25 x 1.5	35	50	35755
BES 8 x 1 1/2	48.3	1 1/2"	M 8	-	-	☑	-	-	4000	25 x 1.5	35	50	35756
BES 8 x 2	60.3	2"	M 8	-	-	☑	-	-	4000	25 x 1.5	35	50	35757
BES 10 x 2 1/2	76.1	2 1/2"	M 10	☑	☑	☑	3781	4181	7000	25 x 2.5	40	50	35708
BES 10 x 3	88.9	3"	M 10	☑	☑	☑	4670	4715	7000	25 x 2.5	40	50	35709
BES 10 x 114	114.3	4"	M 10	☑	☑	☑	6672	6561	7000	25 x 2.5	60	50	35712
BES 12 x 140	139.7	5"	M 12	☑	☑	☑	8896	8896	10000	30 x 2.5	73	50	35714
BES 12 x 168	168.9	6"	M 12	☑	☑	☑	11787	11632	10000	30 x 2.5	83	50	35716

* Min. breaking load according to FM/UL/VdS regulations.



Advantages

- Washer only supplied from 2 1/2".
- One-piece clip guarantees a high permissible load.
- Rigid fastening.
- FM finishing with extra locking nut.

Technical information

- FM-approved and NFPA regulations verified by Metaalinstituut TNO.
- Clip: Sendzimir galvanized (8": Electrolytically zinc plated).
- Nut: Electrolytically zinc plated.

Find more information online:

[Manuals](#)

[Certificates](#)

[CAD drawings](#)

[Extra documentation](#)

Flamco Group

Amersfoortseweg 9

3751 LJ, Bunschoten - Netherlands

T 033-299 75 00

F 033-298 64 45

E info@flamcogroup.com

I www.flamcogroup.com