

ISO pipe fitting

Connector | elbow



Order No.	Ø PE-pipe	Ø Steel pipe	MOP (PN)	L	E	E1	Ø D	Weight
6310ST	32	¾" (D 26,9)	16	132	70	55	53	0,66
6300ST	32	1" (D 33,7)		132	70	55	60	0,76

	Component	Material
1/8	Body (1) tension nut (8)	Ductile iron, epoxy powder coated
2	Grip ring PE	POM
3	Grip ring acier	Hardened acier
4	O-ring	Elastomer
5	Gasket	Elastomer
6	Thrust collar	POM
7	Protective cap	Elastomer

Tip: First strip PE-covered steel pipes to insertion length

Order No.	Ø Pipe	MOP (PN)	L	E	Ø D	Weight
6400	20	16	58	48	39	0,30
	25		72	58	44	0,45
	32		87	70	53	0,80
	40		104	84	65	1,20
	50		141	101	76	1,90
	63		163	114	94	3,15

Order No.	Ø Pipe	MOP (PN)	L	E	Ø D	Weight
6420	20	16	58	48	39	0,07
	25		73	58	43	0,10
	32		87	70	53	0,18
	40		104	82	72	0,37
	50		125	99	83	0,52
	63		144	110	99	0,80


Order No.	Ø Pipe 1	Ø Pipe 2	MOP (PN)	L	E	E1	Ø D	Weight
6490	32	25	16	87/71	70	58	53	0,16
	40	32		102/87	84	70	72	0,27

Order No.	Ø Pipe	MOP (PN)	L	E	Ø D	Weight
6440	40	16	95	84	65	1,20
	50		108	101	76	1,89
	63		119	114	94	2,60

Connector "PE pipe - steel pipe" total restraint

No. 6310ST Made of ductile iron

No. 6300ST Made of ductile iron

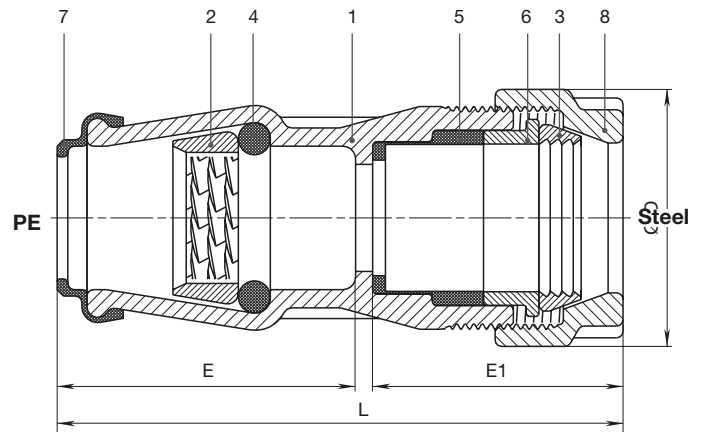


Elbow 90°

No. 6400 Made of ductile iron

No. 6420 Made of POM

Elbow 90° reduced

No. 6490 Made of POM

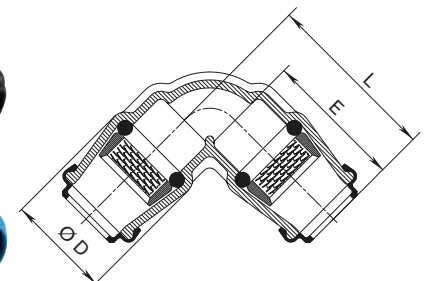

Elbow 45°

No. 6440 Made of ductile iron

