

SYSTEM 2000

E2 valve socket-socket for PE and PVC pipes, PN 10 | PN 16



Design features

- Resilient seated gate valve with smooth straight-through bore
 - With sockets for PE and PVC pipes
 - One extension spindle for several dimensions
 - Suitable for operation by automatic actuators
 - Easy retrofitting for position indicator and automatic actuator on the standard bonnet (DN 50 to DN 200)
- To set-up an actuator or a position indicator, remove the centering flange and insert position indicator or actuator with adapter (DN 250 to DN 350)

Standard version: without handwheel and extension spindle

Special versions: on request

Suitable accessories

Suitable accessories: see page F 1/2

Handwheel:		No. 7800
Extension spindle:	rigid	No. 9000E2
	telescopic	No. 9500E2
Surfaces boxes:	rigid	No. 1750
	telescopic	No. 2050, No. 2051K No. 9920
Actuator:		No. 9920
Adapter for actuator (E2 adapter):		No. 8630E2
Base plate:	No. 3481, No. 3482	
Sealing cap:	No. 2156, No. 2157, No. 2158	
Spindle extension:	No. 7820, No. 7825	
Position indicator:	No. 2170E2	
HAWAK pillar:	No. 9894, No. 9895	

No. 4040E2



Order No.	MOP (PN)	Dimensions/DN Ø pipe A																	
		50	65	80	100	100	125	125	150	150	200	200	225	250	250	280	300	300	350
4040E2	16																		

Application example



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainstraße 13
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com


F 2/3

SYSTEM 2000

E2 valve socket-socket for PE and PVC pipes, PN 10 | PN 16



No. 4040E2

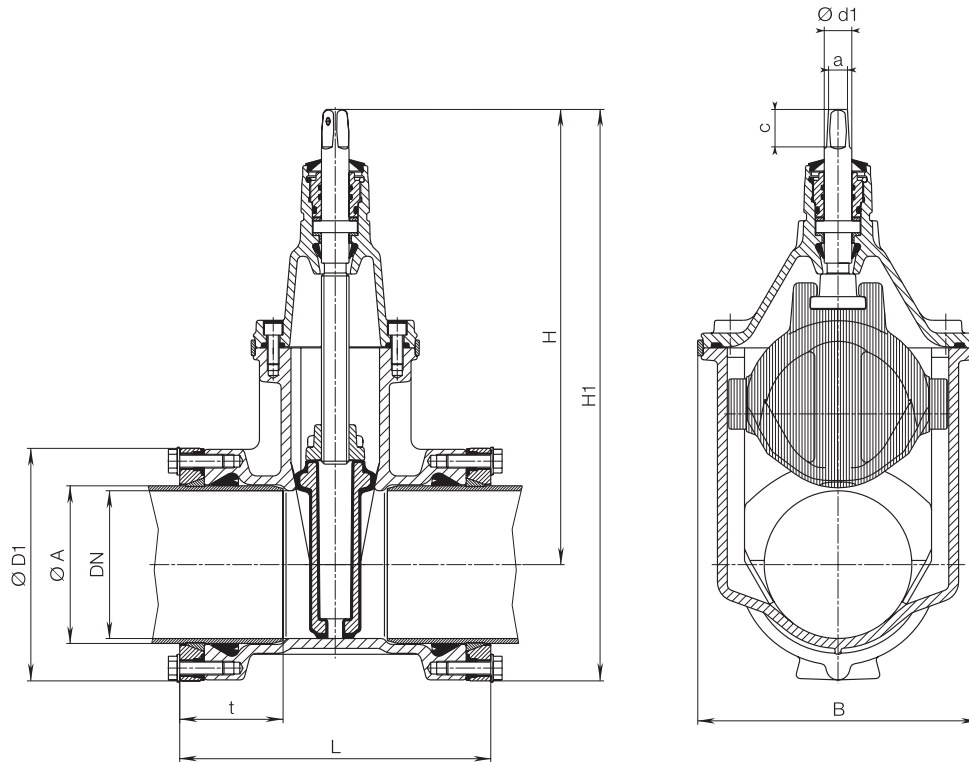

DN	Ø pipe A	Valve						Spindle			Weight
		Ø D1	t	H	H1	L	B	a	c	Ø d1	
50	63	124	83	260	322	226	143	14,8	30	22	8,0
65	75	138	85	328	397	240	180	17,3	35	25	14,5
80	90	152	88	336	412	242	180	17,3	35	25	16,5
100	110	174	88	373	460	252	213	19,3	38	25	20,5
	125	195	88	373	470	260	213	19,3	38	25	19,0
125	125	195	90	450	547	280	285	19,3	38	28	32,0
	140	212	96	450	556	278	285	19,3	38	28	34,30
150	160	236	108	462	580	316	285	19,3	38	28	34,30
	180	258	118	462	591	342	285	19,3	38	28	43,5
200	200	284	128	563	705	366	357	24,3	48	32	65,0
	225	314	130	563	720	366	357	24,3	48	32	70,0
	250	347	147	563	738	469	357	24,3	48	32	81,5
250	250	347	147	670	844	400	432	27,3	48	34	104,0
	280	376	150	670	858	420	432	27,3	48	34	113,0
300	315	422	176	753	964	472	518	27,3	48	34	168,0
	355	470	237	753	988	687	518	27,3	48	34	218,6
350	400	516	253	838	1097	744	603	27,3	48	34	278,5

F 2/4



E. Hawle Armaturenwerke GmbH 4840 Vöcklabruck - Austria - Wagrainer Straße 13
Tel.: +43 (0) 7672 72576 0 - Fax: +43 (0) 7672 78464 - E-Mail: hawle@hawle.at - www.hawle.com